



Beyond FanWall: The Future of Room-Based Cooling in Al Datacenters – Greenfield & Brownfield.

Datacenter Forum, Copenhagen



- Cooling demand expansion for data centers & Al
- 2. Current significance of air cooling
- 3. CoolWall-assisted liquid cooling in new & existing sites




#### **Ever-increasing need for computing power**


Cooling demand expansion

**DC** capacity demand will double by 2030

#### Global data center energy demand (GW)





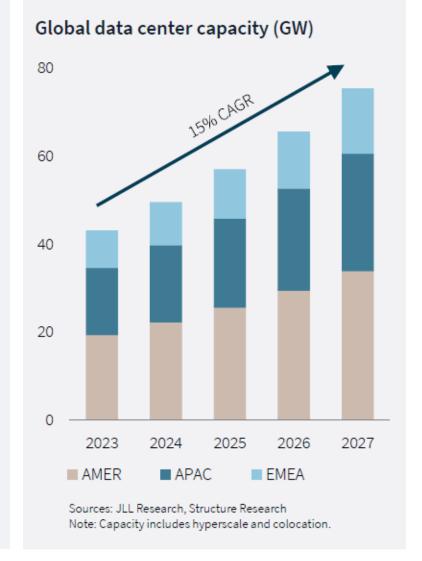




#### Top three uses of global data center demand

Cooling demand expansion

Al is the key growth accelerator

02.10.2025

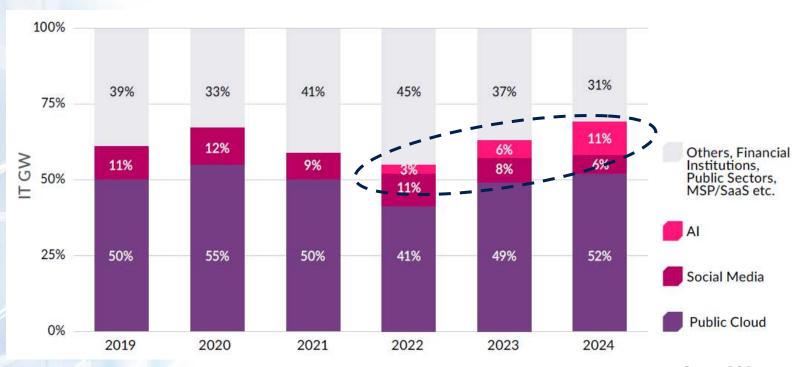


Source: DC Byte



### Al workloads are increasing rack density

Cooling demand expansion

#### AI rack power density range (NVIDIA)

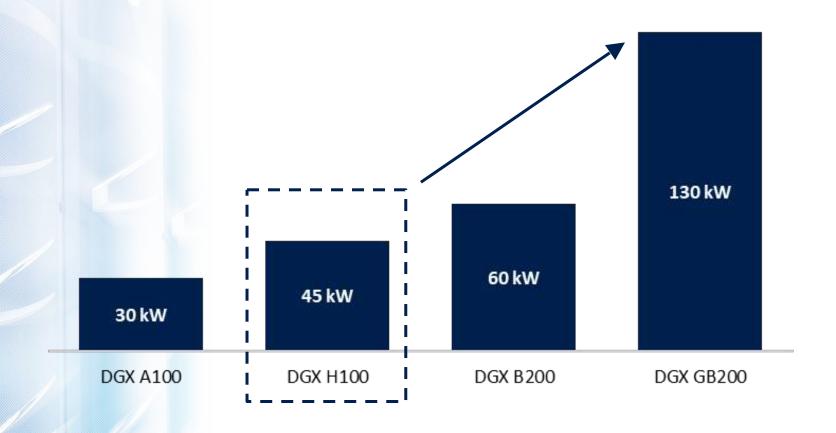

The AI data center market is moving towards greater rack densities




#### Applicable cooling technologies by rack density

Current significance of air cooling

Air cooling systems are coming to its limits


02.10.2025

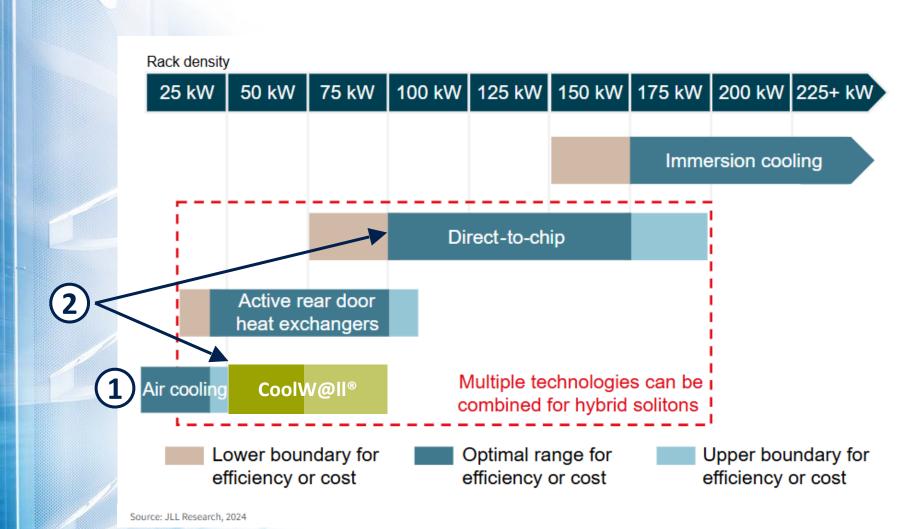




### FanWalls: the copy-and-paste solution nobody questions

Current significance of air cooling

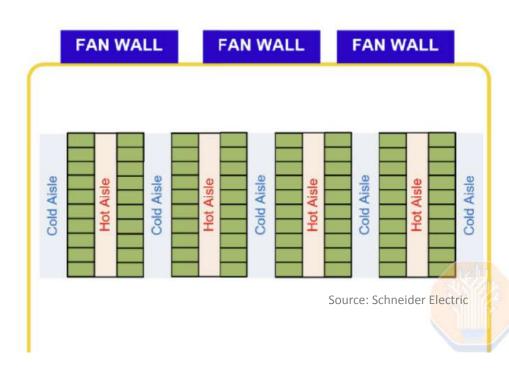



- Low CAPEX compared to multiple RDHx
- Clear separation from IT allows easier maintenance
- Reduced energy consumption

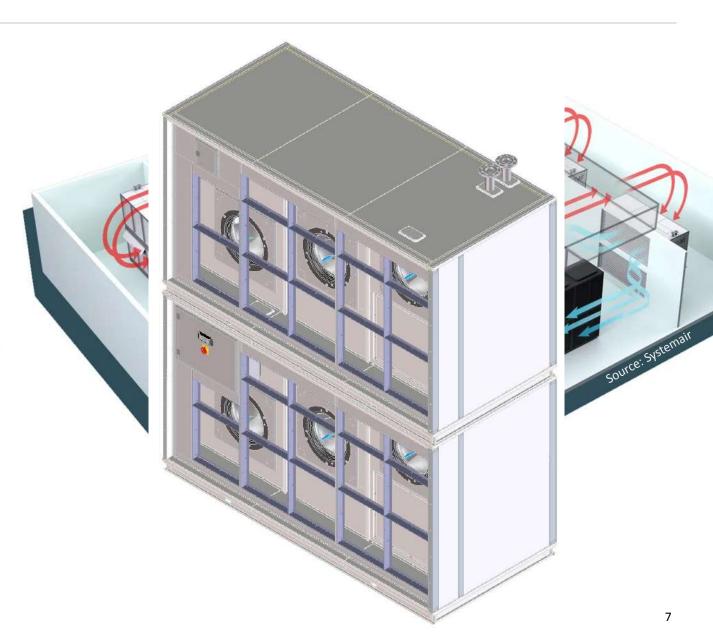




#### Efficient cooling redefined: Vindur® CoolW@ll®


Current significance of air cooling

# Built-in solution that maximizes cooling potential

- Utilizing almost the entire room height/width
- Transform service corridors into a walk-in cooling chambers
  - Enlarged coil and filter surfaces
  - Reduced internal pressure losses
  - Minimized floor space requirements

Highest capacity per footprint with minimal power consumption!

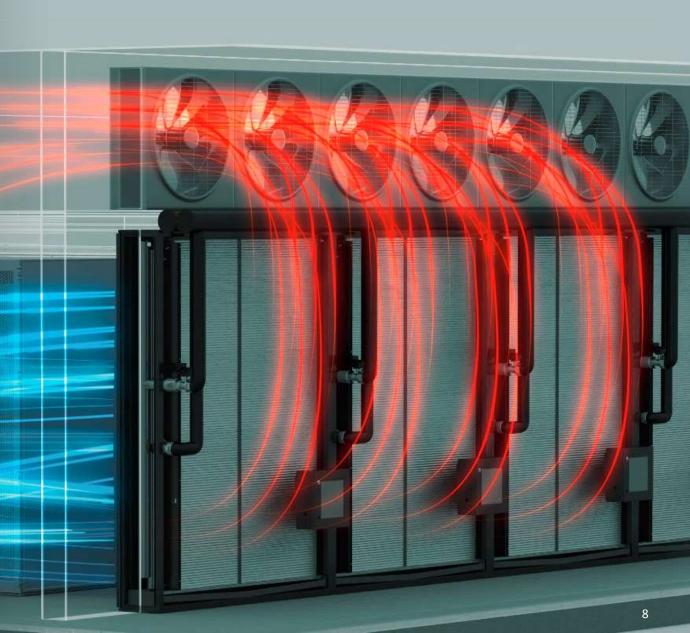

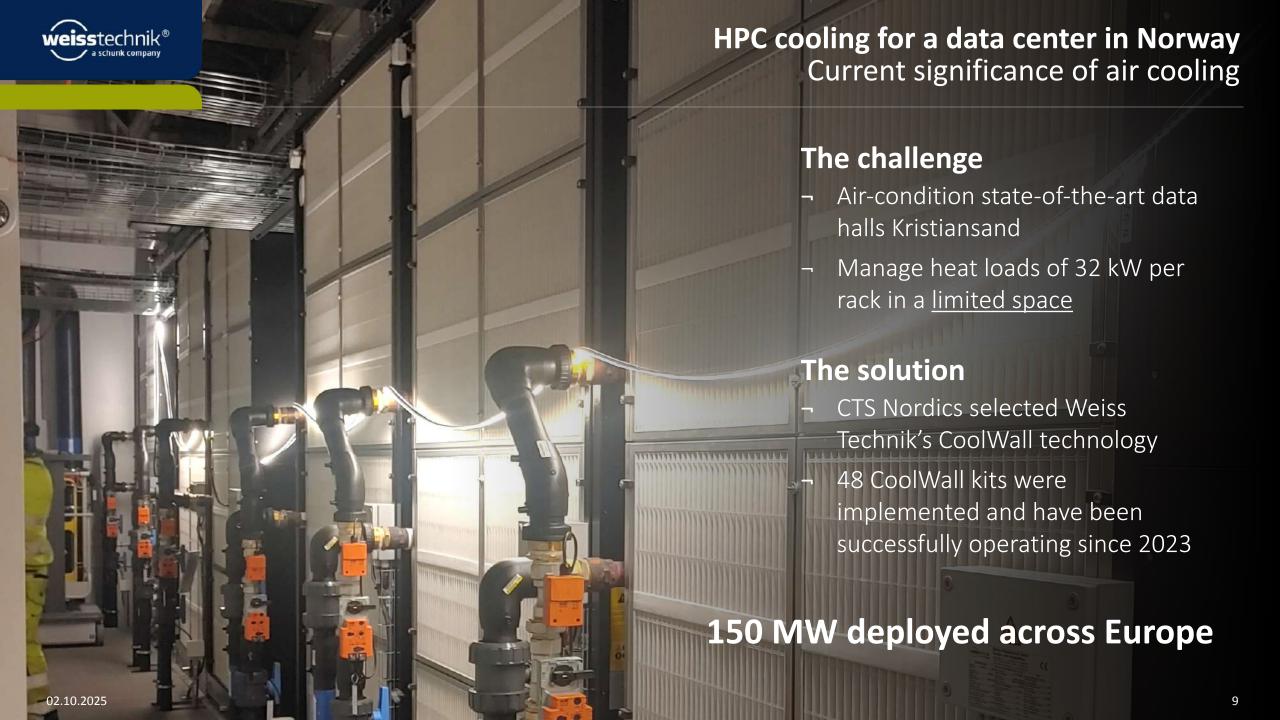




#### Minimizing the technical corridor width

Current significance of air cooling




Possible space saving for two adjacent dualcorridor rooms: at least 10 meters

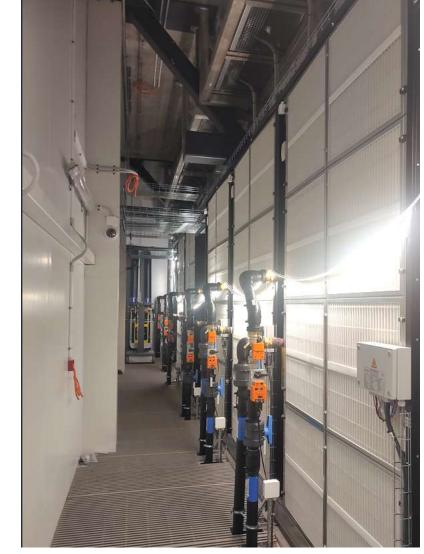



#### Pushing the boundaries of air cooling to the limits

Current significance of air cooling

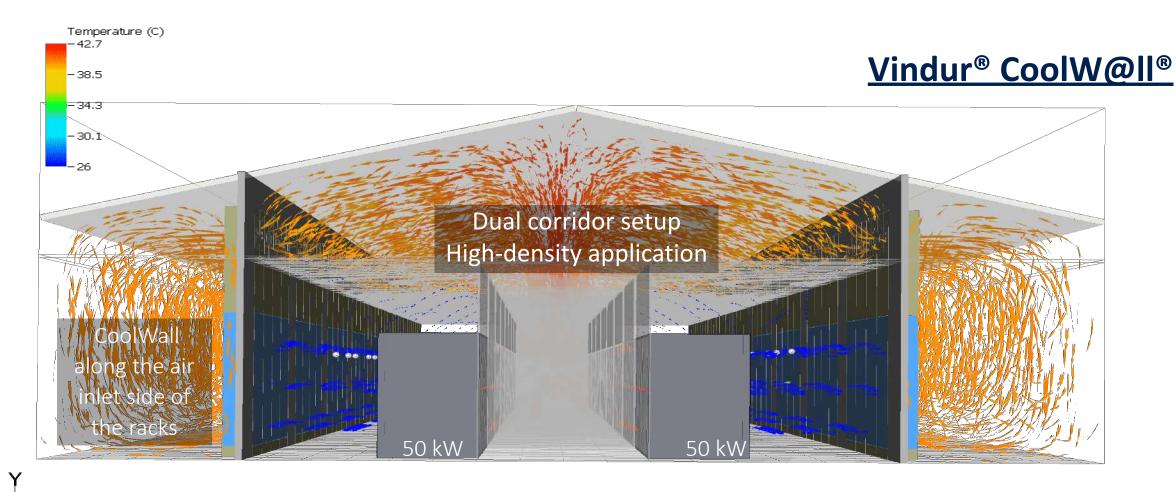








# **NVIDIA GB200 NVL72** – The next chapter in generative AI.

- 36 Grace Blackwell Superchips per rack
- Heat load: 132kW
- 15 % of the heat requires air, plus extra air-cooled networking racks within each pod
- 30 % of the heat load must still be handled by air cooling
- Liquid cooling is becoming vital
- Air Cooling will still play a key role
- The future is HYBRID!



#### The Mechanics of Direct-to-Chip Liquid Cooling (DLC)

CoolWall-assisted liquid cooling

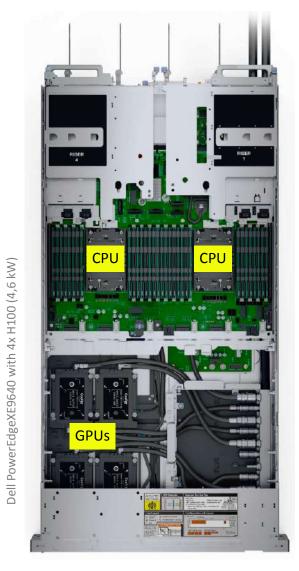


**DLC** server **Technical Cooling** System (TCS) Coolant **Distribution Unit** (CDU) **Facility Water** System (FWS)

Source: Alfa Laval



#### **CoolWall: the smart option for the remaining heat load**


CoolWall-assisted liquid cooling

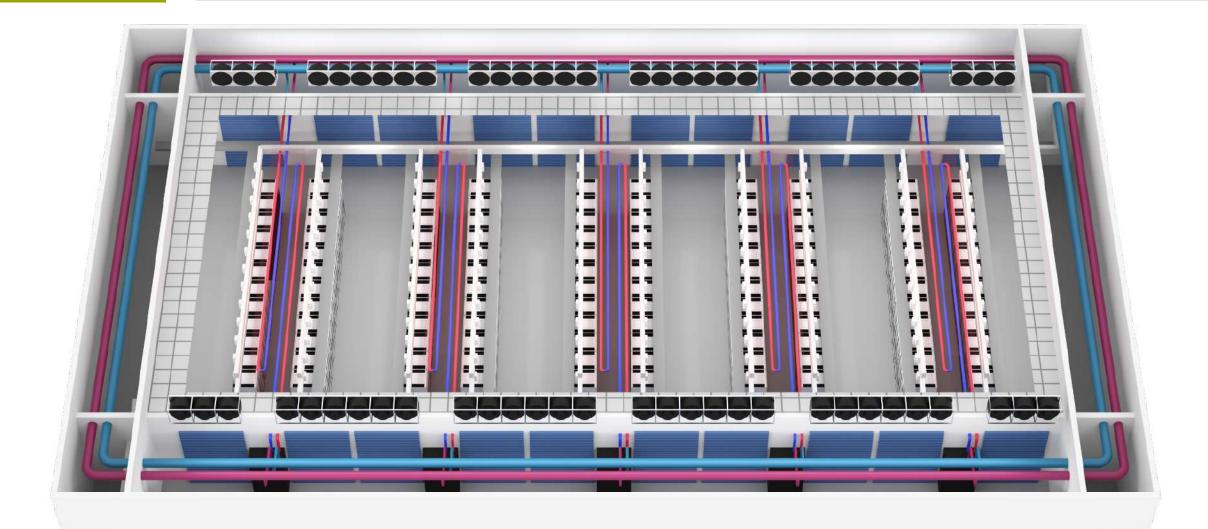



## Application example: hybrid cooling with DLC and CoolWall

CoolWall-assisted liquid cooling

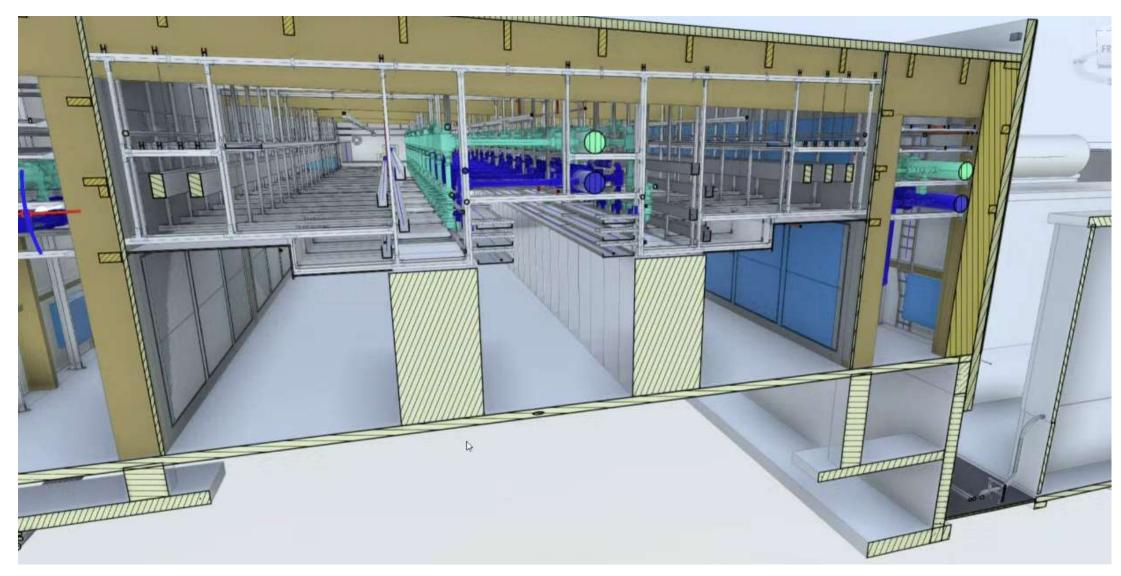




#### Hundreds of existing sites with CRAH units need to be refurbished

CoolWall-assisted liquid cooling



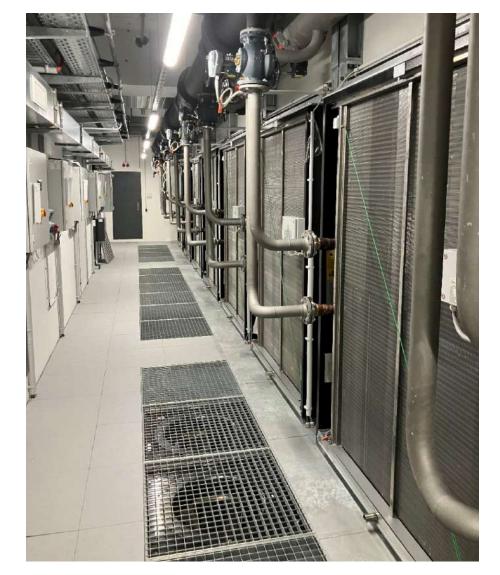





#### Disclaimer

This document is copyright protected. It was created exclusively for information, training and further education purposes and is intended for your personal use only. Any other use of the presentation, be it in whole or in part, in particular the duplication and distribution of the presentation to third parties, requires our prior written consent. Violations of the copyright law have legal consequences under civil and criminal law.

#### Weiss Klimatechnik GmbH

Greizer Straße 41 - 49 35447 Reiskirchen – Germany Phone +49 6408 84-6500 info@weiss-technik.com weiss-technik.com